
4

В

₽

Α

0 0 **-**.75 -► -1.50-TOP Ø .500 (MB3A) or -Ø .433 (MB3C) 1.70 1.03 BOTTOM 1/4-20 UNC - 2B -MOUNTING HOLE  $\bigcirc$ .50 .25

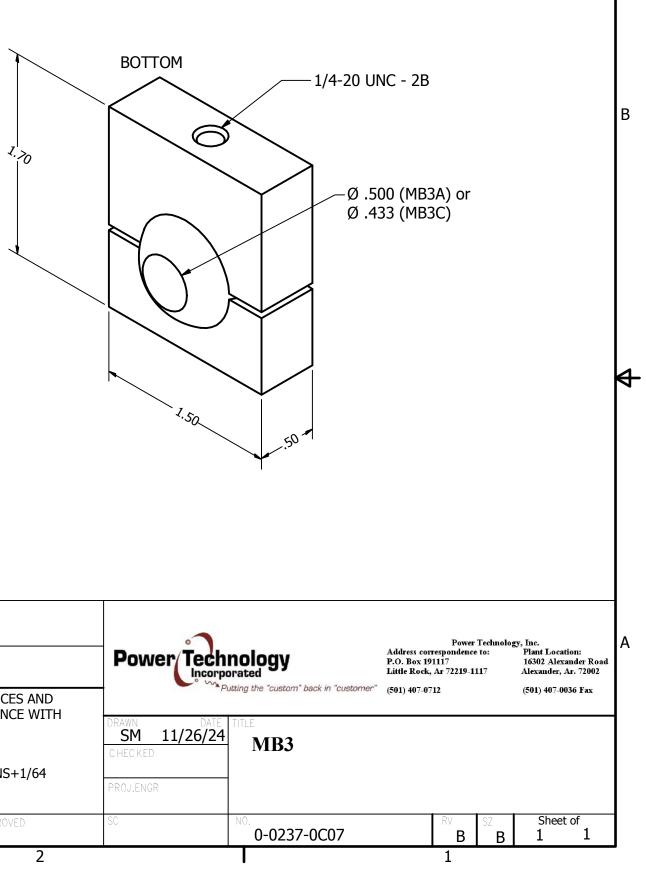

A					NOTES: 1 INTERPRET DRAWING PER 40M114 2 THE CONTRACTOR. POWER TECHNOLOGY INC. HEREBY CERTIFIES THAT. TO THE BEST OF ITS KNOWLEDGE AND BELIEF, THE TECHNICAL DATA DELIVERED HEREWITH UNDER THE SUBJECT CONTRACT IS COMPLETE, ACCURATE AND COMPLIES	MATERIAL		Power
REVISION LOG         DOCUMENT #       DESCRIPTION       DATE       NAME       REV					WITH ALL REQUIREMENTS OF THE CONTRACT. 3 WORKMANSHIP SHALL BE IN ACCORDANCE WITH MIL- HDBK - 454. GUIDELINE 9. 4 Anodize Per mil-A-8625 Type II Class II	DIMENSIONAL TOLERANCES AND SYMBOLS IN ACCORDANCE WITH ANSI Y14.5M-1982 .xx±.01 ∠±2°		DRAWN SM 11/26/2 CHECKED
0-0237-0C07 0-0237-0C07 0-0237-0C07	ORIGINAL DOCUMENT ADDED 1/4-20 HOLE NOTE CHANGED MODEL TO ADD .050 GAP	06/03/13 02/29/24 11/26/24	JD SM SM	- PROPRIETARY INFORMATION NOTICE: Despite any other copyrig notices, this document and information disclosed herein contains confidential, proprietary designs owned by POWER TECHNOLOG Information contained herein shall NOT be reproduced, used or disclosed without the written authorization of POWER TECHNOLOG		.xxx±.005 FRACTIONS+1/64 SCRATCH & DIG >63		PROJ.ENGR
	4				3 <b>Z</b>	ENGR	APPROVED 2	SC

3

 $\mathbf{\Phi}$ 

2